


RR763-EF80 BLACKVIBE MICRO EF80

**No Reverb No Tremolo Single Channel AB763 Blackface Vibroverb
With EF80 Power Tubes In A Princeton Reverb Chassis**

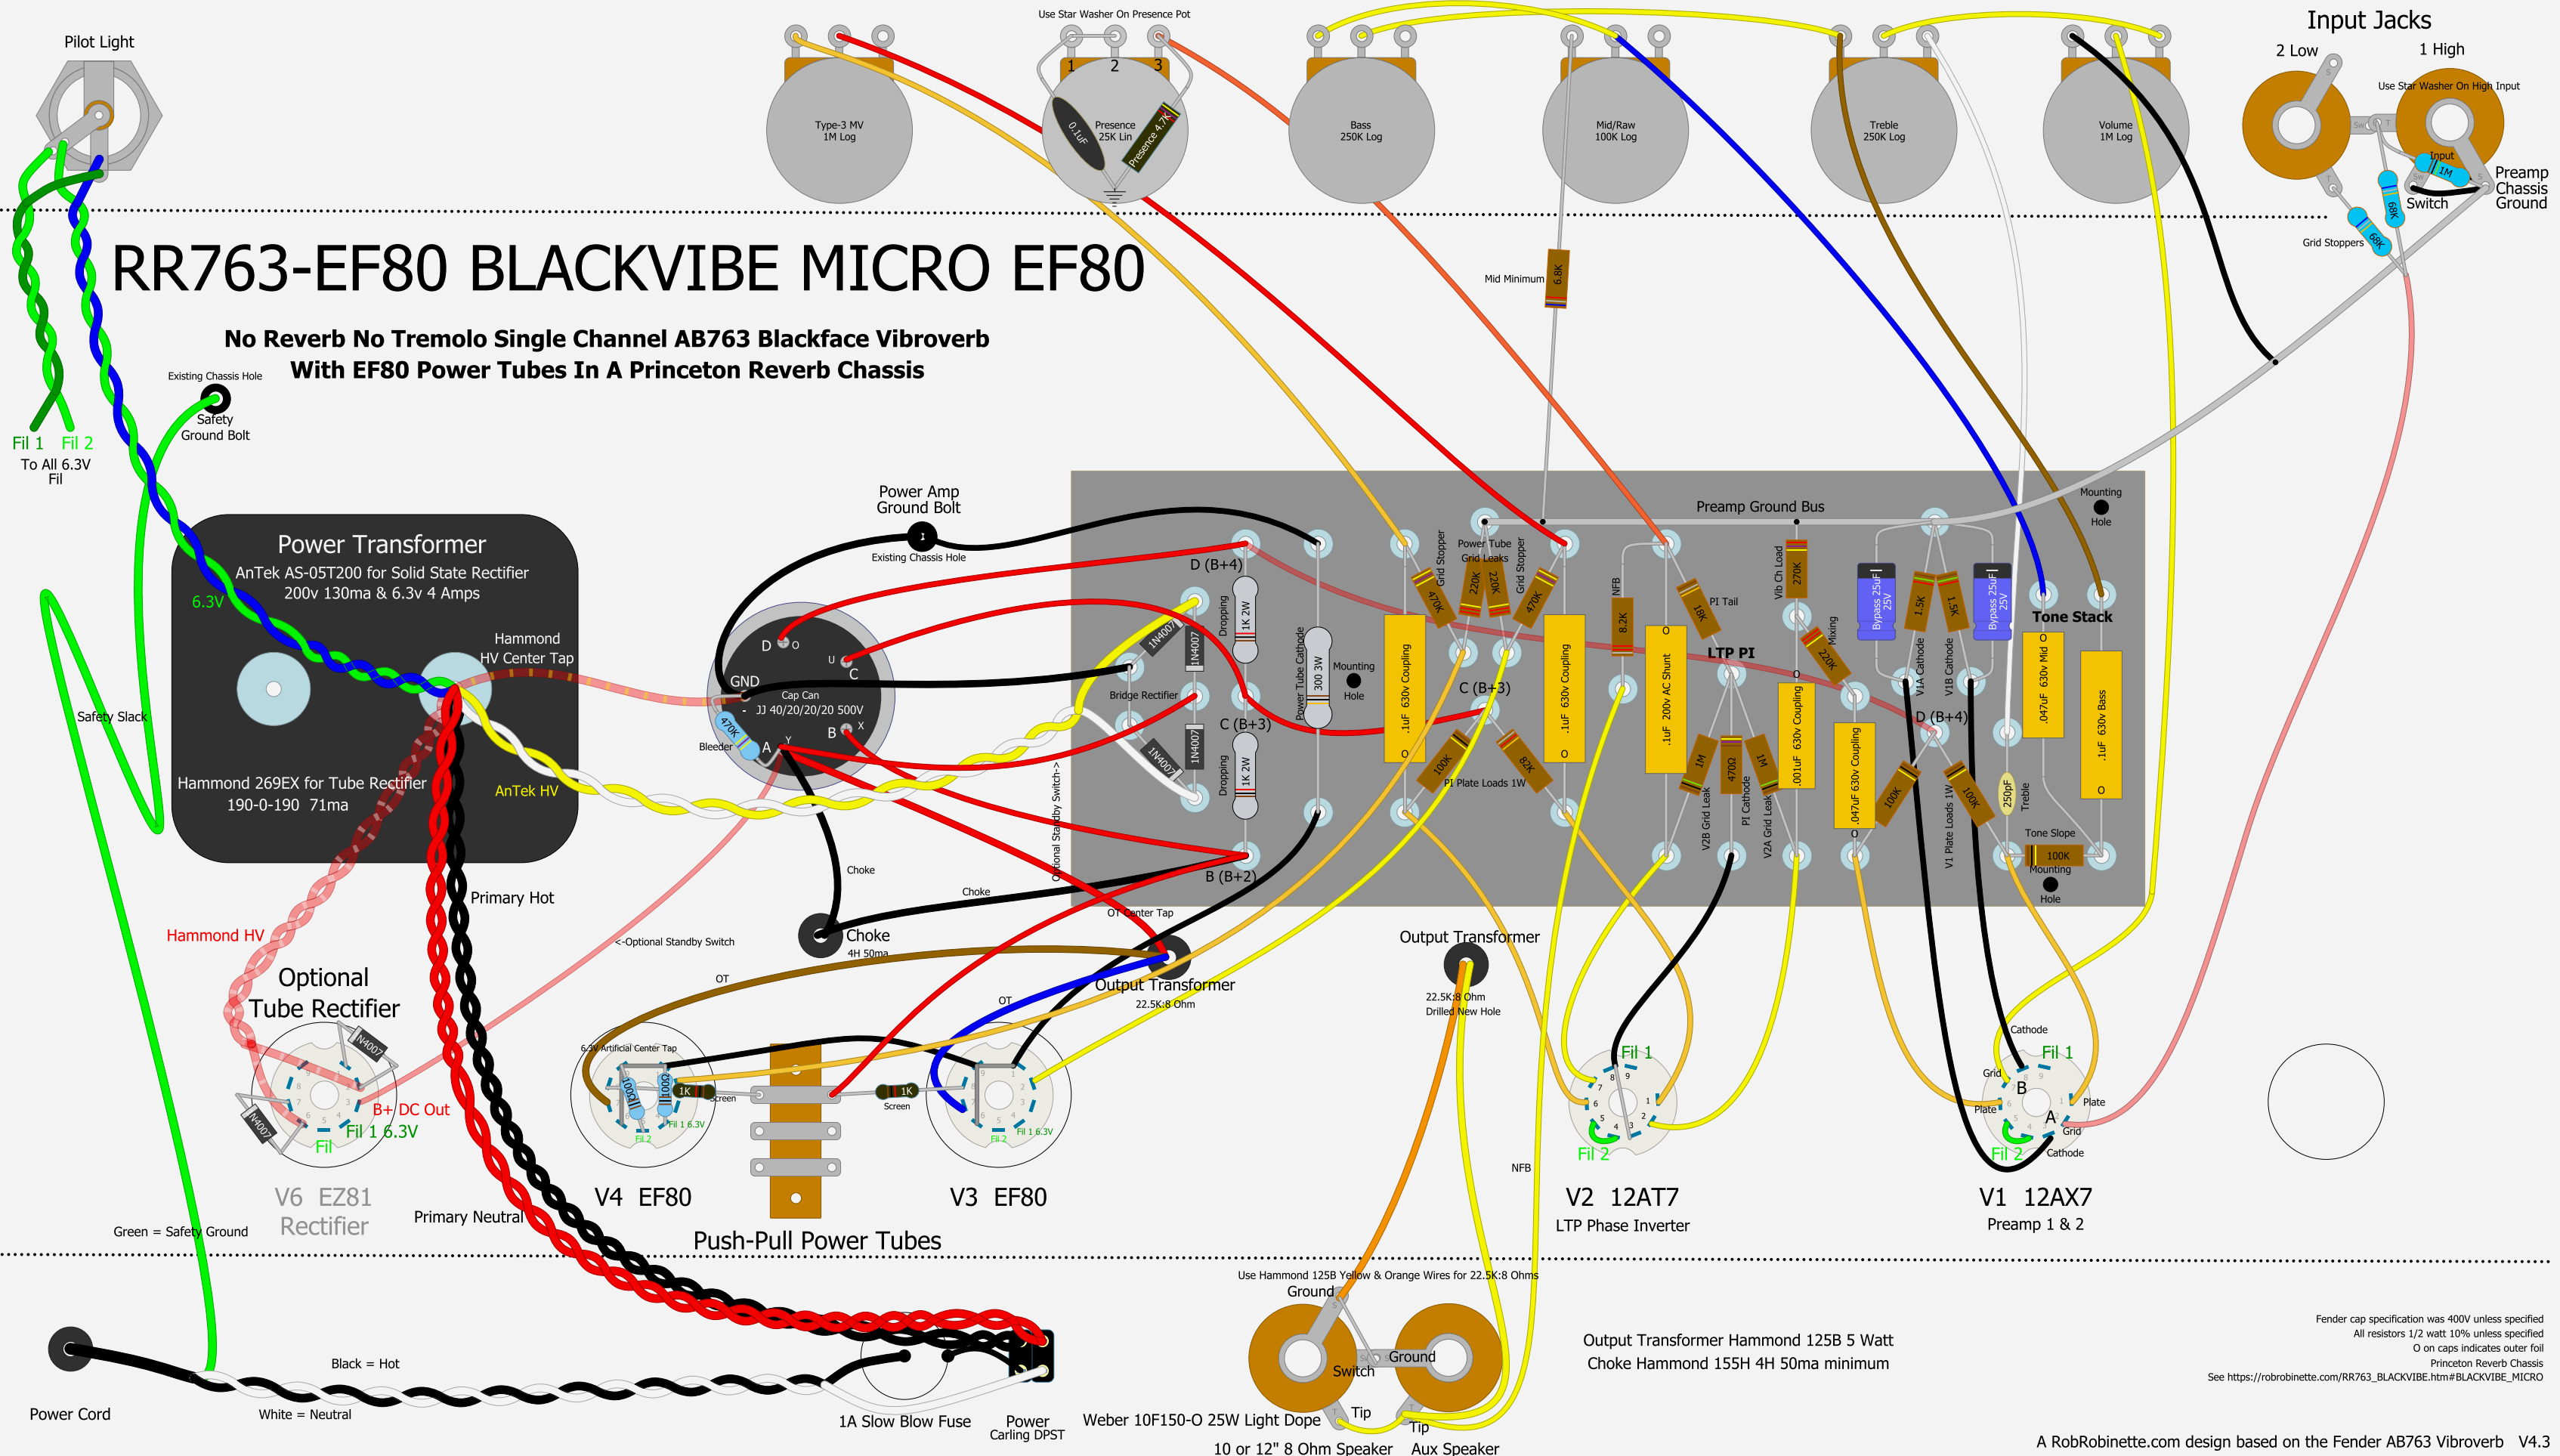

Fil 1 Fil 2
To All 6.3V
Fil

Existing Chassis Hole
Safety
Ground Bolt


Power Transformer
AnTek AS-05T200 for Solid State Rectifier
200v 130ma & 6.3v 4 Amps

Hammond HV Center Tap

Hammond 269EX for Tube Rectifier
190-0-190 71ma

AnTek HV

**Optional
Tube Rectifier**



V6 EZ81
Rectifier

V4 EF80

V3 EF80


Push-Pull Power Tubes

Output Transformer



V2 12AT7
LTP Phase Inverter

V1 12AX7
Preamp 1 & 2

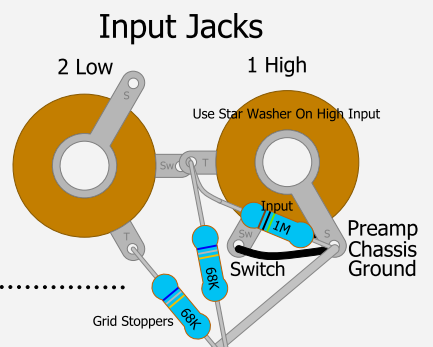

Power Cord

White = Neutral

Black = Hot

1A Slow Blow Fuse

Power Carling DPST

Weber 10F150-O 25W Light Dope

10 or 12" 8 Ohm Speaker

Aux Speaker

Output Transformer Hammond 125B 5 Watt
Choke Hammond 155H 4H 50ma minimum

Fender cap specification was 400V unless specified
All resistors 1/2 watt 10% unless specified
O on caps indicates outer foil
Princeton Reverb Chassis
See https://robinette.com/RR763_BLACKVIBE.htm#BLACKVIBE_MICRO